




IR..M

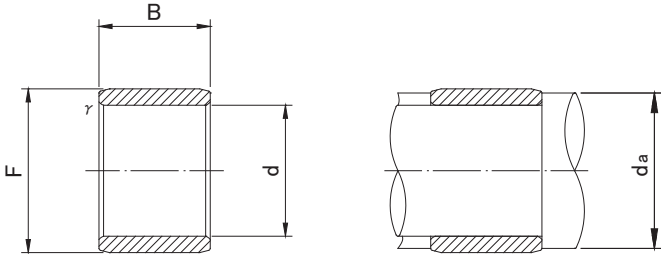


IR..M TYPE

Shaft Diameter (mm) 	Designation 	Dimensions (mm)				Standard mounting dimensions (mm)			Usable bearing designation 			
					<i>f</i> 's min	da				RNA49..M	NK..M	
						MIN	MAX					
5	IR 5710M IR 5812M IR 5816M	5 5 ⁰ _{-0.008} 5	7 8 8	10 12 16	0.15 0.3 0.3	6.2 7 7	6.7 7.7 7.7	1.4 3 4	RNA495M — —	— NK8/12M NK8/16M		
	6	IR 6810M IR 6912M IR 6916M IR 61010M	6 6 ⁰ _{-0.008} 6 6	8 9 9 10	10 12 16 10	0.15 0.3 0.3 0.3	7.2 8 8 8	7.7 8.7 8.7 9.7	1.7 3.2 4.3 4	RNA496M — — —	— NK9/12M NK9/16M —	
		7	IR 7910M IR 71012M IR 71016M	7 7 ⁰ _{-0.008} 7	9 10 10	10 12 16	0.15 0.3 0.3	8.2 9 9	8.7 9.7 9.7	1.9 3.6 5	RNA497M — —	— NK10/12M NK10/16M
8			IR 81011M IR 81210M	8 8 ⁰ _{-0.008}	10 12	11 10	0.15 0.3	9.2 10	9.7 11	2.4 4.8	RNA498M —	— —
			9	IR 91211M IR 91212M IR 91216M	9 9 ⁰ _{-0.008} 9	12 12 12	11 12 16	0.3 0.3 0.3	11 11 11	11.5 11.5 11.5	3.1 4.5 6	RNA499M — —
10	IR 101412M IR 101413M IR 101416M IR 101420M	10 10 ⁰ _{-0.008} 10 10		14 14 14 14	12 13 16 20	0.3 0.3 0.3 0.3	12 12 12 12	13 13 13 13	7 7.5 9 11.5	— RNA4900M — —	— — NK14/16M NK14/20M	
	12	IR 121612M IR 121613M IR 121616M IR 121620M		12 12 ⁰ _{-0.008} 12 12	16 16 16 16	12 13 16 20	0.3 0.3 0.3 0.3	14 14 14 14	15 15 15 15	8 8.5 10.5 13.5	— RNA4901M — —	— — NK16/16M NK16/20M
		15	IR 151916M IR 151920M IR 152012M IR 152013M	15 15 ⁰ _{-0.008} 15 15	19 19 20 20	16 20 12 13	0.3 0.3 0.3 0.3	17 17 17 17	18 18 19 19	12.5 16 12 13.5	— — — RNA4902M	NK19/16M NK19/20M — —
			17	IR 172213M IR 172216M	17 17 ⁰ _{-0.008}	22 22	13 16	0.3 0.3	19 19	21 21	15.5 19	RNA4903M —



IR..M

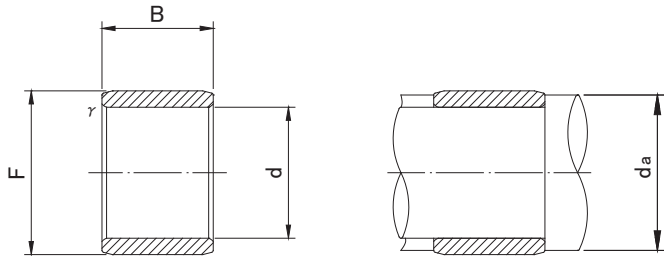

IR..M TYPE

Shaft Diameter (mm) 	Designation	Dimensions (mm)				Standard mounting dimensions (mm)			Mass	Usable bearing designation	
											
	IR..M	d	F	B	r _s min	da			g (approx)	RNA49..M	NK..M
						MIN	MAX				
20	IR 202516M IR 202517M	20 ⁰ _{-0.010}	25 25	16 17	0.3 0.3	22 22	24 24		22 23	— RNA4904M	— —
25	IR 253016M IR253017M	25 ⁰ _{-0.010}	30 30	16 17	0.3 0.3	27 27	29 29		28 28.5	— RNA4905M	— —
30	IR 303820M	30 ⁰ _{-0.010}	38	20	0.6	34	37		65	—	—
35	IR 354220M	35 ⁰ _{-0.012}	42	20	0.6	39	41		65	—	—
50	IR 506020M	50 ⁰ _{-0.012}	60	20	1	55	59		135	—	—